

## LSTF-940/6 -2S

### Cavity Filter

Stop Band Range	940.1-946.3MHz
Insertion Loss in pass band	$\leq 2.0\text{dB}@30-920.1\text{Mhz}$ $\leq 3.5\text{dB}@949.5-3000\text{Mhz}$
VSWR	$\leq 1.8:1$
Stop Band attenuation	$\geq 40\text{dB}$
Band Pass	30-920.1Mhz&949.5-3000Mhz
Max. Power	1W
Connectors	SMA_Female (50 $\Omega$ )
Surface Finish	Black
Configuration	As Below (tolerance $\pm 0.3\text{mm}$ )

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd


电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> [Leader-mw@hotmail.com](mailto:Leader-mw@hotmail.com)

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

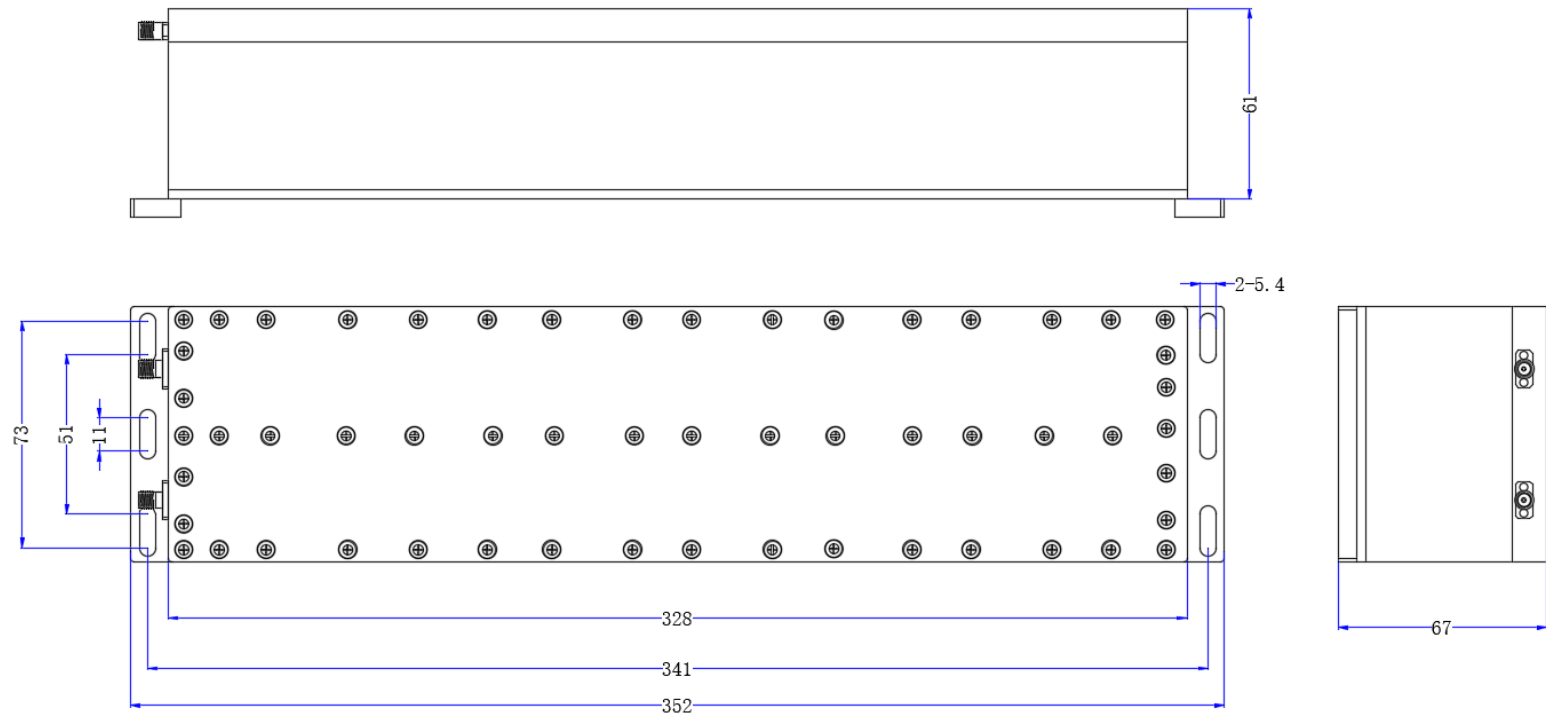

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> [Leader-mw@hotmail.com](mailto:Leader-mw@hotmail.com)

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

