


LSJ-DC-40-2.92a-2w attenuator

Specifications

- Frequency Range: DC~40GHz
- Impedance: 50 OHMS
- Attenuator range: X dB
- VSWR: ≤1.30 : 1
- Impedance: 50 OHMS
- Port Connectors: (2.92mm)
- Power Handling: 2Watt@25-70°C
- Temperature range: -55-100°C

(dB) Attenuator	(Attenuation)
	DC-40GHz
1-10	±0.8
10-20	±1.0
20-30	-1.0/+1.3
40	-1.0/+1.5

Outline Drawing(mm)

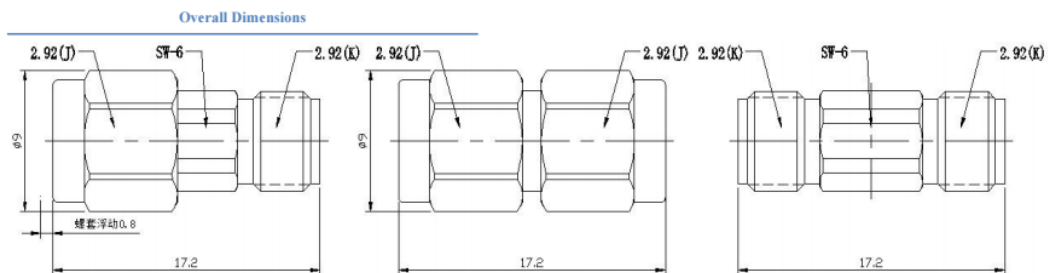

Mechanical Specifications

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000



利德尔

ISO9001:2008 质量认证
ISO14001:2004 环境认证

S/N: SF180503
技术文件 Technical Specifications Rev:A0

Enclosure	Stainless Steel Passivation
Pin	Male: Gold50micro-inches Female: Beryllium Bronze Gold50micro-inches
Insulators	PEI
Humidity	100% RH at 35 ℃, 95%RH at 40 ℃
Weight	5G

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

http://www.leader-mw.com Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000