

Product: **Coaxial Circulator**

Part Number: LHX-23.8/24.2-SMA

Specification			
No.	Parameter		Units
1	Frequency range	23.8-24.2	GHz
2	Insertion Loss	≤0.6	dB
3	Isolation	≥18	dB
4	VSWR	≤1.3	dB
5	Impedance	50	Ω
6	Forward Power	1W/cw	
7	Operating Temperature Range	-30~+70℃	
8	Connecter	SMA	
9	Direction	1→2→3 clockwise	
10	Preferred finish	silver plated	

Mechanical Specifications	
Housing	Aluminum oxidation
Connector	ternary alloy three-part alloy
Contact:	gold plated beryllium brass
Rohs	compliant
Weight	0.1kg

Outline Drawing:

All Dimensions in mm

Tolerances : Unnoted tolerances are in class m of GB-T1804-2000

All Connectors: SMA

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd


电话: 028-65199117 传真: 028-65199116

<http://www.leadermicrowave.com> sales@leader-mw.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

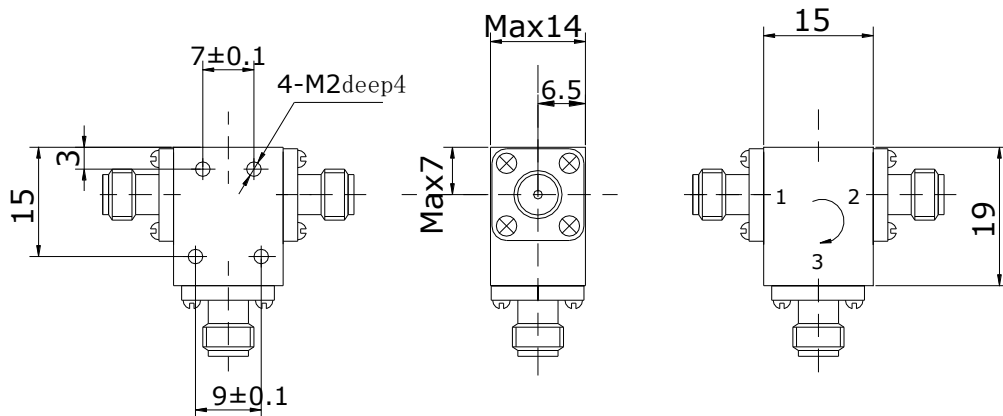

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leadermicrowave.com> sales@leader-mw.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000