

Product: 16dB directional Coupler



Part Number: LDC-1/12.4-16S

Specification					
No.	Parameter	Minimum	Typical	Maximum	Units
1	Frequency range	1	-	12.4	GHz
2	Nominal Coupling		16		dB
4	Insertion Loss			1.5	db
5	Coupling Accuracy	-	-	±1.0	dB
6	Coupling Sensitivity to Frequency		±0.8-		dB
7	Directivity:	18			dB
8	VSWR	-		1.35	-
9	Power			20	W cw
10	Operating Temperature Range	-40	-	+85	°C
11	Impedance	-	50	-	Ω
12	Connector	SMA-F			
13	Preferred finish	Yellow conductive oxidation			

**Remarks:**

1.Include Theoretical loss 0.11db 2.Power rating is for load vswr better than 1.20:1

Environmental Specifications	
Operational Temperature	-40°C~+85°C
Storage Temperature	-50°C~+95°C
Vibration	25gRMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave,3 axis both directions
Mechanical Specifications	
Housing	Aluminum
Connector	stainless steel
Female Contact:	gold plated beryllium brass
Rohs	compliant
Weight	0.2kg

**Outline Drawing:**

All Dimensions in mm

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leadermicrowave.com> [sales@leader-mw.com](mailto:sales@leader-mw.com)

TEL: +86-28-65199117 FAX: +86-28-65199116


Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

Outline Tolerances  $\pm 0.5(0.02)$

Mounting Holes Tolerances  $\pm 0.2(0.008)$

All Connectors: SMA-Female

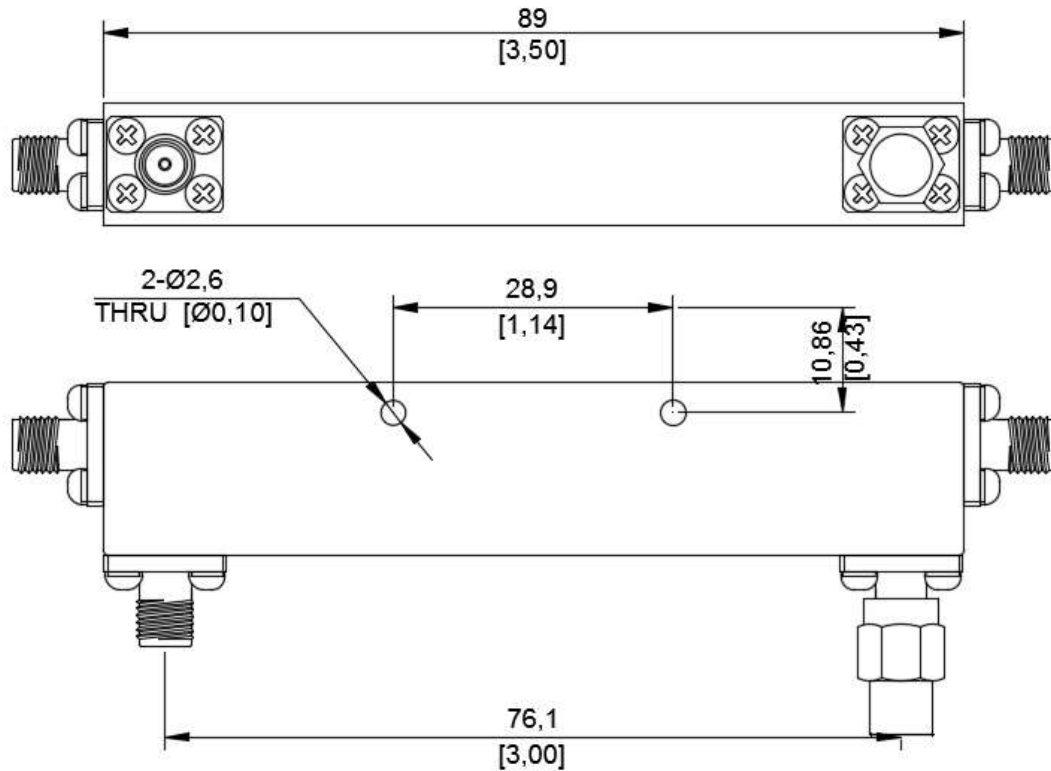

TEST DATA

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leadermicrowave.com> [sales@leader-mw.com](mailto:sales@leader-mw.com)

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000