

Product: Coaxial Isolator



Part Number: LGL-28.9/29.5-2.92 -NJ

Specification				
No.	Parameter	+25°C	-30~+70°C	Units
1	Frequency range	28.9-29.5		GHz
2	Insertion Loss	≤0.4	≤0.6	dB
3	Isolation	≥20	≥18	dB
4	VSWR	≤1.2	≤1.25	dB
5	Impedance	50		Ω
6	Forward Power	5W/cw 1W/RV		
7	Operating Temperature Range	-30~+70°C		
8	Connecter	2.92-F		
9	Direction	1→2→ clockwise		


Mechanical Specifications	
Housing	Aluminum oxidation
Connector	Stainless Steel
Contact:	copper
Rohs	compliant
Weight	0.1kg

Outline Drawing:

All Dimensions in mm

Tolerances : Unnoted tolerances are in class m of GB-T1804-2000

All Connectors: 2.92

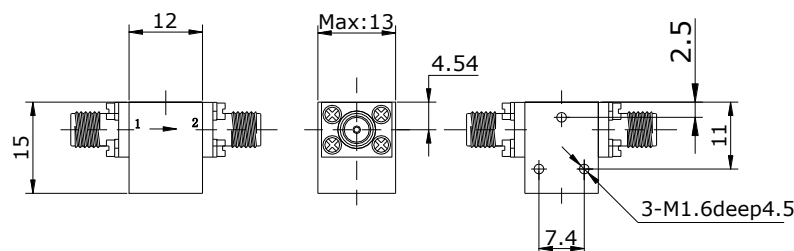

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116


http://www.leadermicrowave.com sales@leader-mw.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

Test data

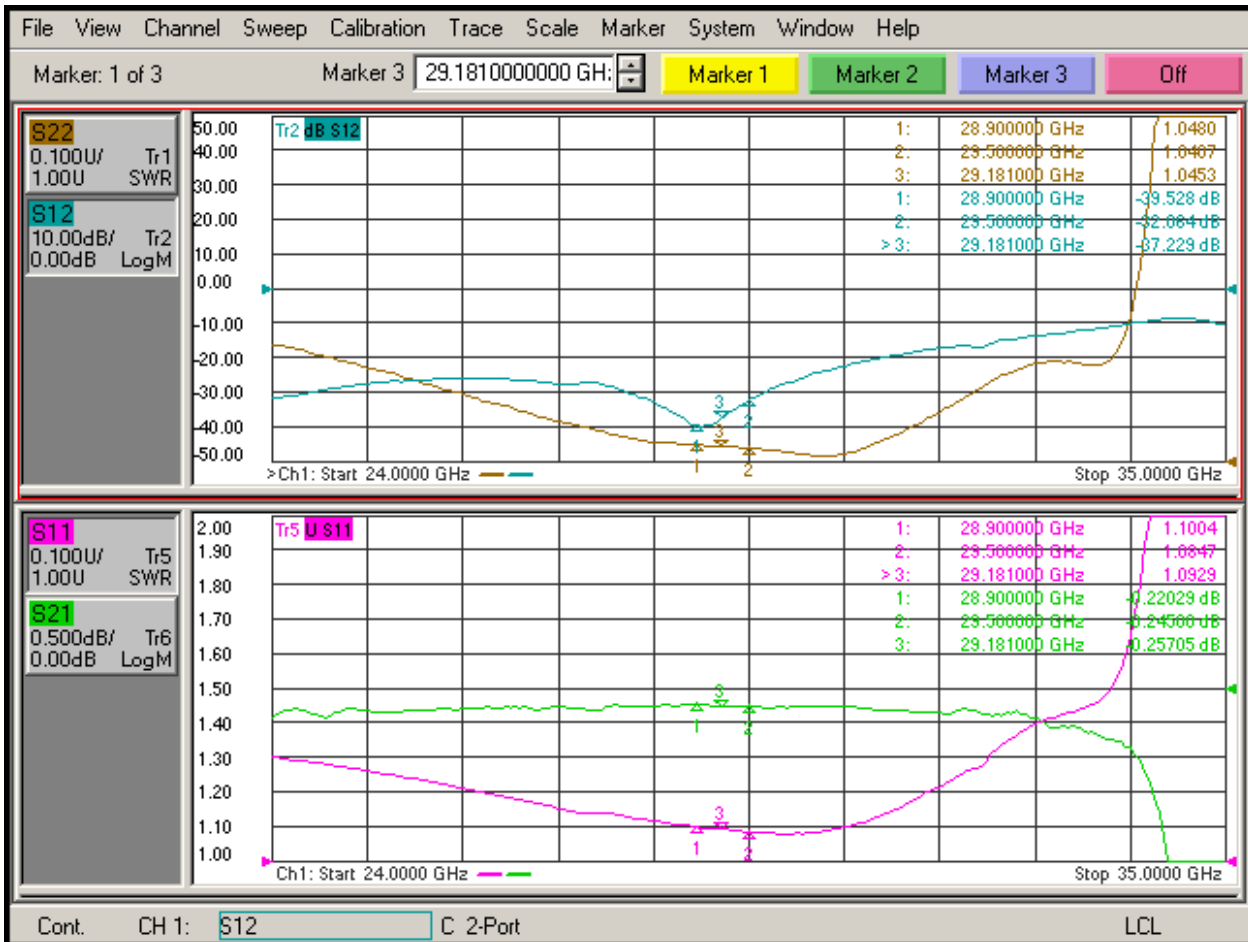

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leadermicrowave.com> sales@leader-mw.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000