

LCB-5/9/16 -3N

Combiner 3*1

Frequency Range	5000-6000 MHz	9000-10000MHz	16000-17000 MHz
Insertion Loss	≤1.5dB	≤1.8dB	≤2.5dB
VSWR	≤1.8:1		
Isolation	≥50dB@9000-10000Mhz	≥50dB@5000-6000Mhz	≥50dB@5000-6000Mhz
	≥50dB@16000-17000Mhz	≥50dB@16000-17000Mhz	≥50dB@9000-10000Mhz
Operating .Temp	-20°C~+55°C		
Storage Temperature	-35°C~+65°C		
Max. Power	50W		
Connectors	N_Female (50Ω)		
Surface Finish	Black		
Configuration	As Below (tolerance ±0.3mm)		

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd


电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

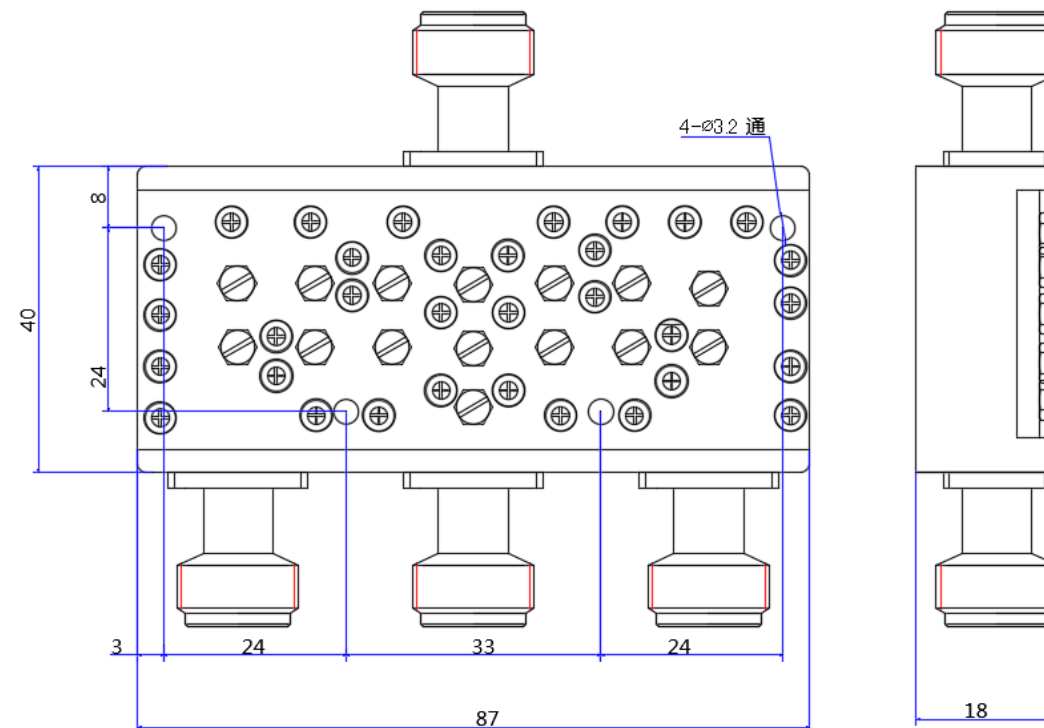

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000