


LDC-0.25/0.35-90N

90 Degree 3dB Bridge

● Frequency Range:	250~350MHz
● Coupling:	3 ± 0.3 dB
● Phase Balance:	± 3 Degrees
● VSWR:	$\leq 1.15 : 1$
● Isolation:	≥ 25 dB
● Impedance:	50 OHMS
● Port Connectors:	N-Female
● Power Handling:	500 Watt
● Operating Temperature:	-45°C to +85°C

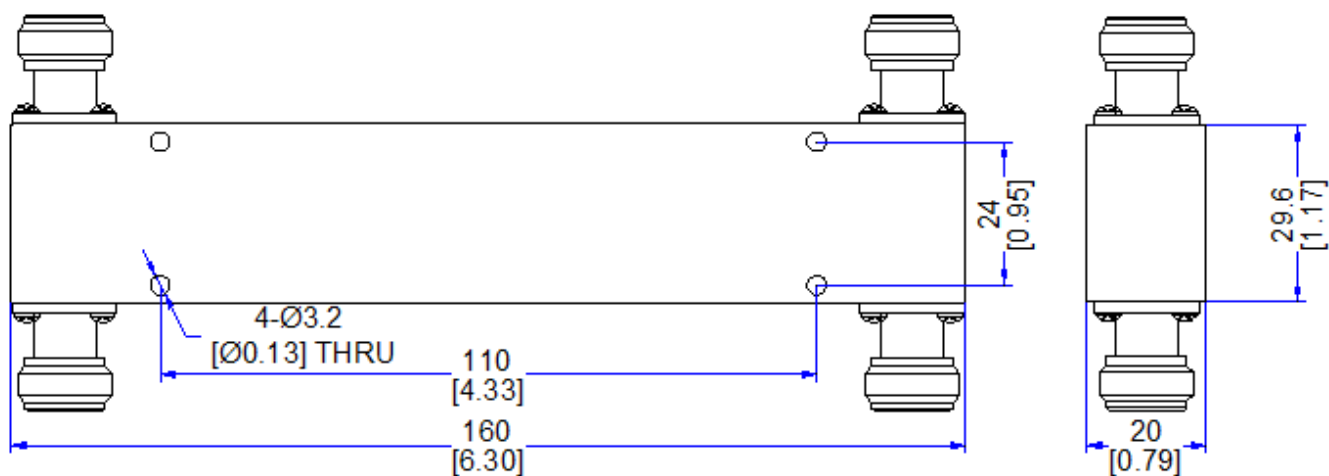

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd






电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

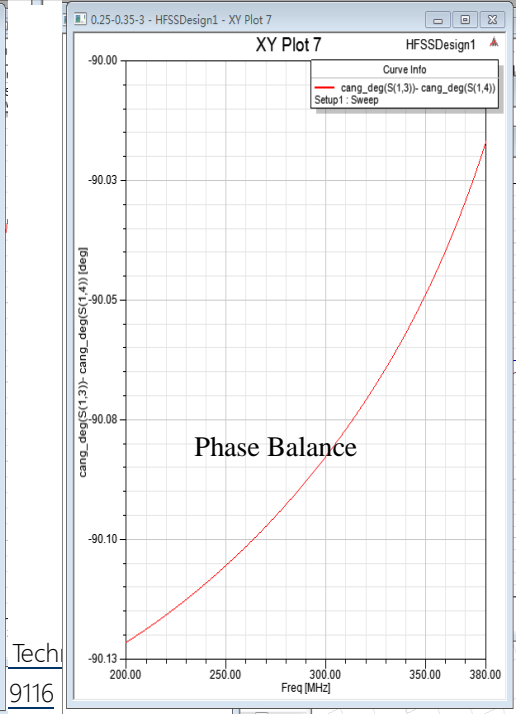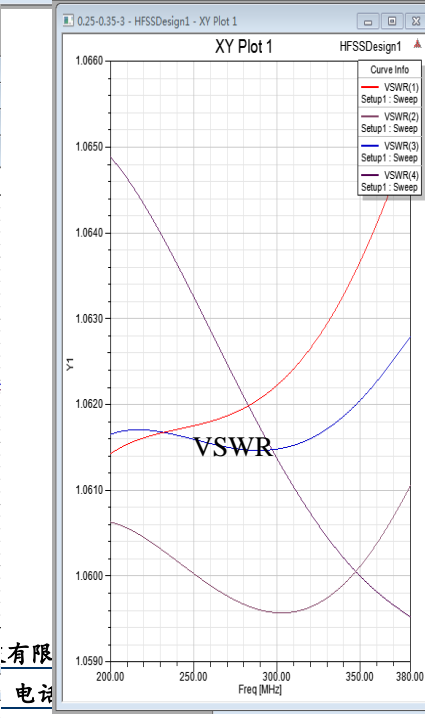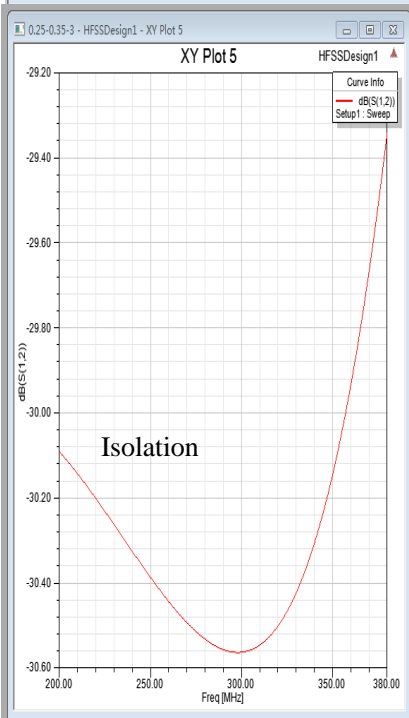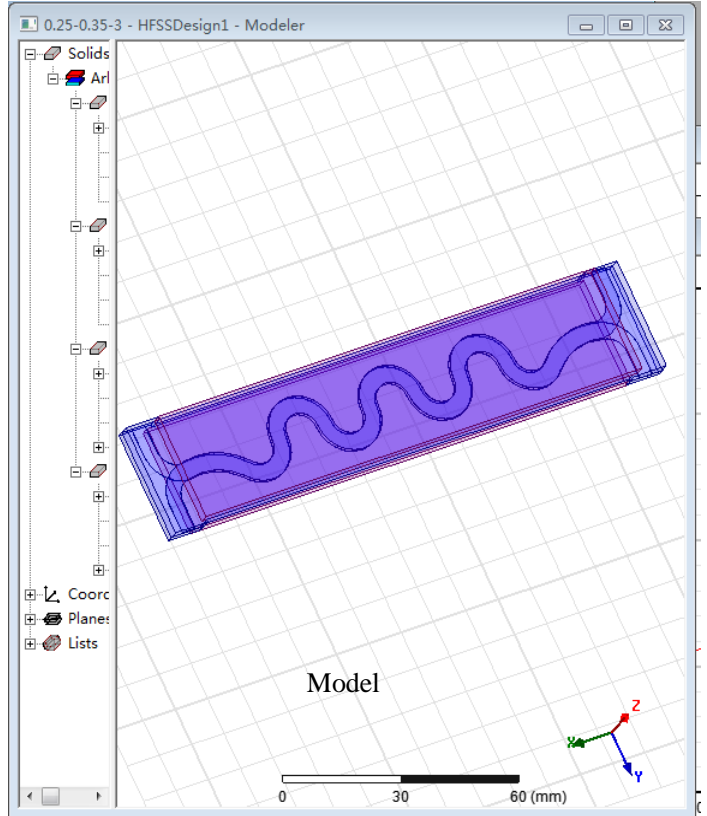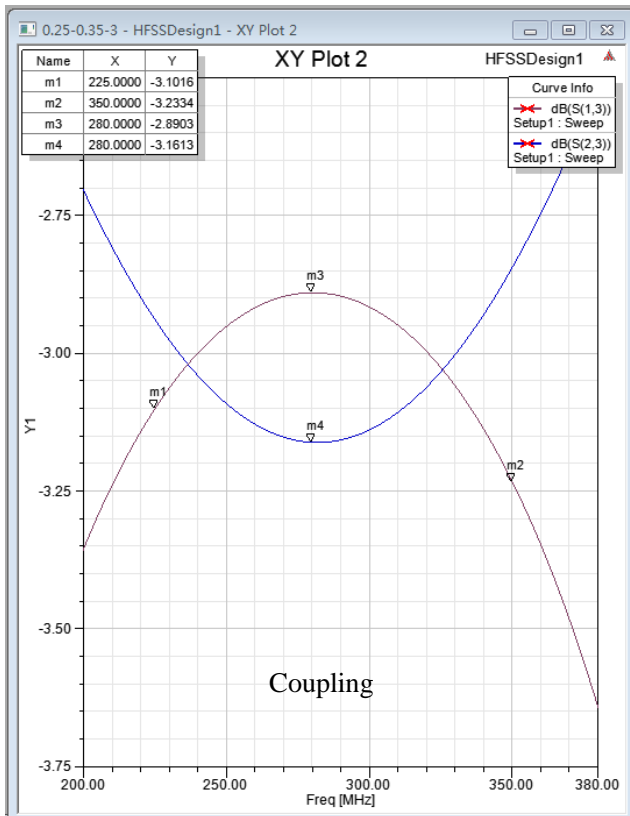

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000