


LDC-0.4/13-30s

Directional Coupler

Specifications

● Frequency Range:	400~1300MHz
● Insertion Loss:	≤0.65dB (0.4-6GHz) ≤1.25dB (6-13GHz)
● VSWR:	≤1.35 : 1
● Coupling	30±1dB(0.4-8GHz) ±1.5dB(8-13GHz)
● Directivity	≥15dB(0.4-6GHz)
● Impedance:	50 OHMS
● Port Connectors:	SMA-Female
● Power Handling:	500Watt

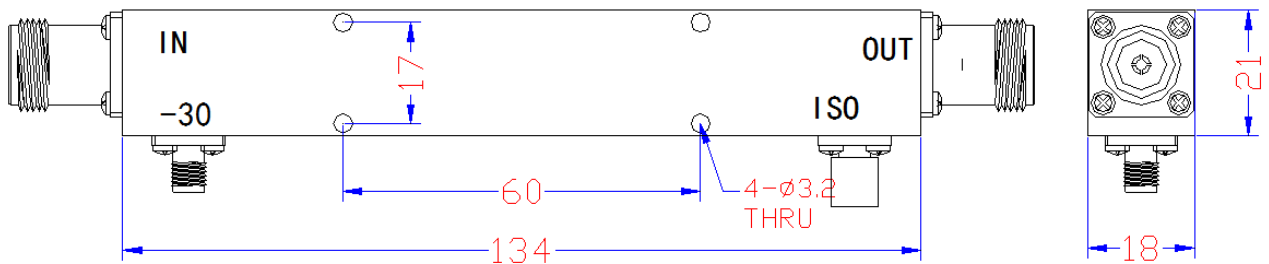

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000