


## LDC-4/8-30N-600W

### Cavity coupler

Frequency Range	4000-8000MHz
Coupling	$30 \pm 1.5$
Insertion Loss	$\leq 0.3\text{dB}$
Isolation	$\geq 42\text{dB}$
VSWR	$\leq 1.35:1$
Impedance	50 OHMS
Port Connectors	N-Female
Power Handling	600W
Surface Finish	black
Configuration	As Below (tolerance $\pm 0.3\text{mm}$ )

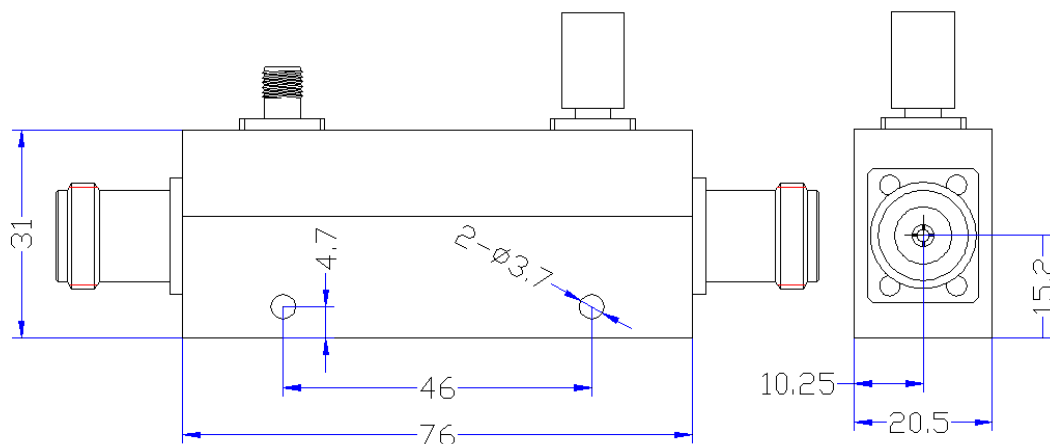

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000