


LHPF-2400/3000-2S

LC Filter

Frequency Range	2400-3000MHz
Insertion Loss	≤1.0dB
VSWR	≤1.5:1
Rejection	≥45dB@Dc-1000MHz
Power	1W
Port Connectors	SMA-Female
Surface Finish	Black
Configuration	As Below (tolerance ±0.3mm)

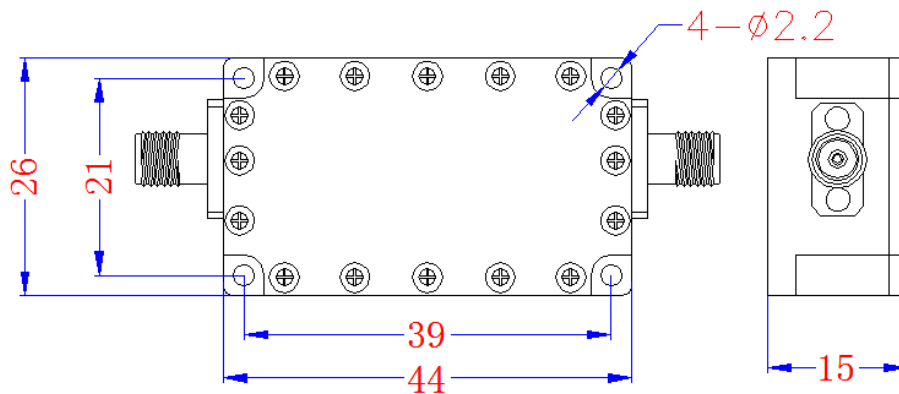

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000



利德尔

ISO9001:2008 质量认证
ISO14001:2004 环境认证

S/N: SF1502-210928
技术文件 Technical Specifications Rev:A0



成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000