


## LHX (2850-2860) -N Circulator specification

NO	(Items)	(Specifications)
1	(Frequency Range)	2850-2860GHz
2	(Insertion Loss)	$\leq 0.3\text{dB}$
3	(VSWR)	$\leq 1.25$
4	(Isolation)	$\geq 20\text{dB}$
5	(Port Connectors)	N-Female
6	(Power Handling)	150W AV ; 4KW/PK (Pulse Width $\geq 100\mu\text{S}$ ) ; 120W/RV
7	(Impedance)	$50\ \Omega$
8	(Direction)	Clockwise (1 $\rightarrow$ 2 $\rightarrow$ 3)
9	Operating Temperature	$-30\sim+70\text{ }^{\circ}\text{C}$
10	Finish	Nickel Plated
11	(Configuration)	As Below

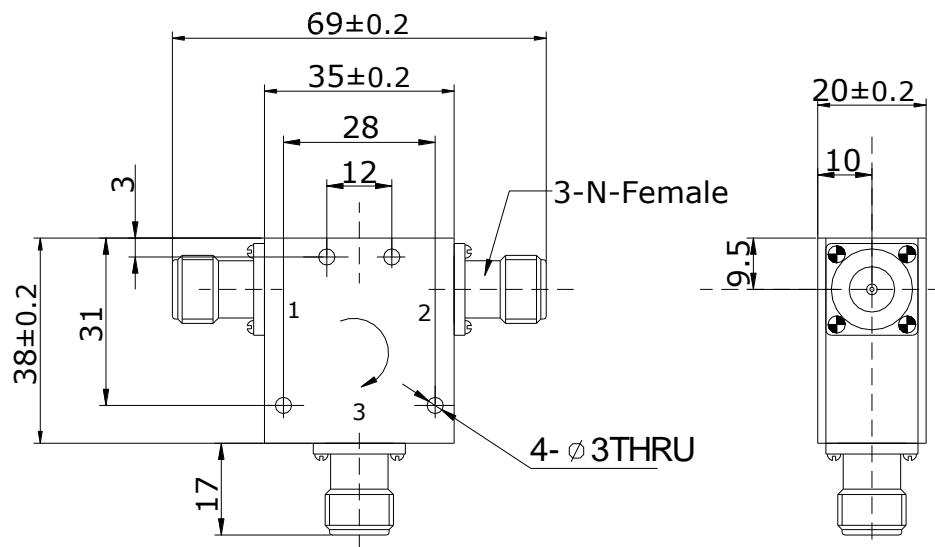

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000