




利德尔

LHX- (34-36) -WR28 Circulator specification

NO	(Items)	(Specifications)
1	(Frequency Range)	34-36GHz
2	(Insertion Loss)	$\leq 0.3\text{dB}$
3	(VSWR)	≤ 1.2
4	(Isolation)	$\geq 23\text{dB}$
5	(Port Connectors)	WR28
6	(Power Handling)CW	12W
7	(Impedance)	$50\ \Omega$
8	Temperature	$-30 \sim +75^\circ\text{C}$
9	(Configuration)	As Below

Outline Drawing Unit: mm

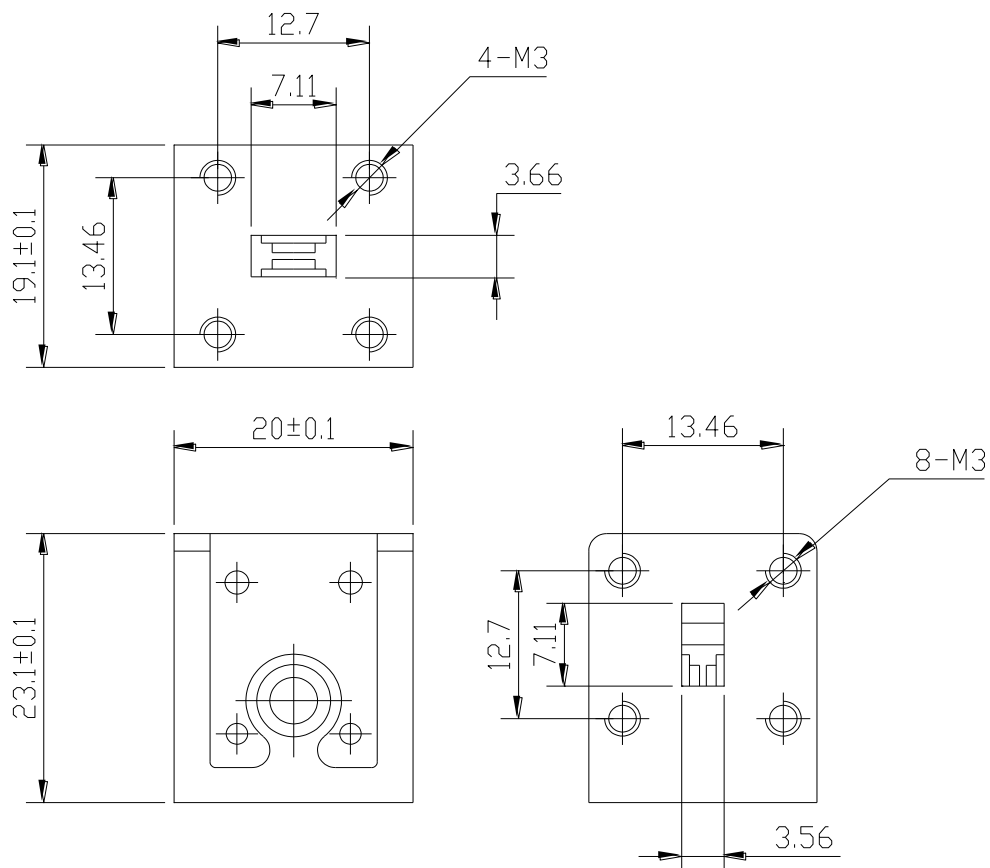

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000