

LSJ-DC/6-BNC

Coaxial detector

LEADER-MW	Specifications
Item	Specification
Frequency range	DC ~ 6GHz
Impedance (Nominal)	50Ω
voltage sensitivity	500mV/Mw
Low level sensitivity	-40dbm
Power	20dbm(100Mw)
V.S.W.R (Max)	1.5
frequency response	±0.5
Connector type	N-M(input) BNC-F(output)
dimension	19.85*53.5mm
Temperature Range	-55°C~ 85°C
Weight	0.1KG
Colour	Sliver
LEADER-MW	Mechanical

Housing	Brass Nickel Plated
Connecter	Brass Nickel Plated

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

http://www.leader-mw.com Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000



ISO9001:2008 质量认证
ISO14001:2004 环境认证

S/N: SF180503

技术文件 Technical Specifications Rev:A0


利德尔

RoHs	compliant
Female contact	Gold plated brass
Male contact	Gold plated brass

All Dimensions in mm

All Connectors: BNC-F、N-M

Tolerance : $\pm 0.3\text{MM}$

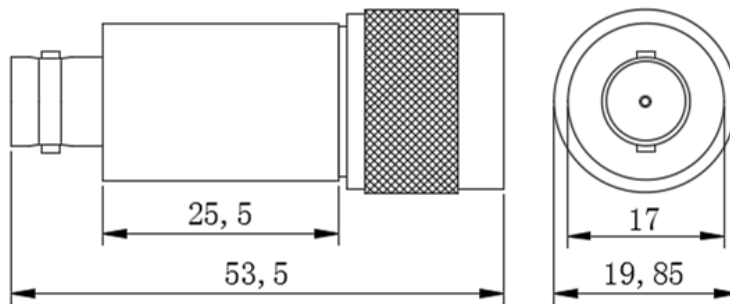

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

http://www.leader-mw.com Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000