

Part No:LKTSJ-8.2/12.4-FDP100

Level Setting Attenuator



Specifications

Item	Minimum	Typical	Maximum	Units
Frequency range	8.2		12.4	Ghz
Insertion loss			0.5	dB
Power rating	2 Watt@25°C			Cw
Attenuation			30dB+/- 2 dB/max	dB
V.S.W.R (Max)			1.35	
Connector type	PDP100			
Convenient Level Setting	Manual Test Set			
Temperature Range	-40		85	°C
Colour	Natural conductive oxidation ,gray Painted Body			
Environmental Specifications				
Operational Temperature	-40 °C~+85 °C			
Storage Temperature	-50 °C~+105 °C			
Vibration	25gRMS (15 degrees 2KHz) endurance, 1 hour per axis			
Humidity	100% RH at 35 ℃, 95%RH at 40 ℃			
Shock	20G for 11msec half sine wave,3 axis both directions			
Mechanical Specifications				
Housing Heat Sinks:	aluminum			

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116


Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

Connector	FDP100
Rohs	compliant
Weight	150g
Outline	

All Dimensions in mm

Tolerance : $\pm 0.3\text{MM}$

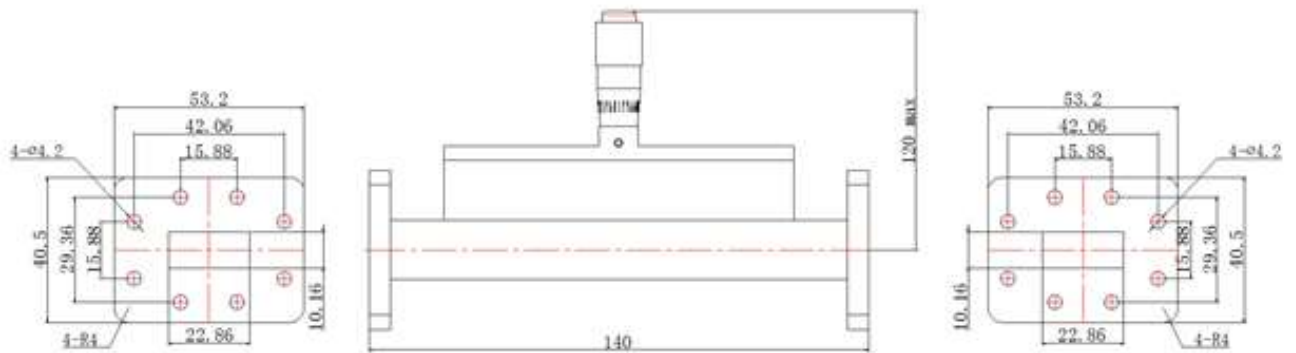

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000