


LLPF-DG/6-2S

Microstrip line Filter

Frequency Range	DC-6GHz
Insertion Loss	≤ 1.0 dB
VSWR	$\leq 1.6:1$
Rejection	≥ 50 dB @ 6.85-11GHz
Operating Temperature	-20°C to +60°C
Power Handling	0.8W
Port Connector	SMA_Female
Surface Finish	Black
Configuration	As Below (tolerance ± 0.3 mm)

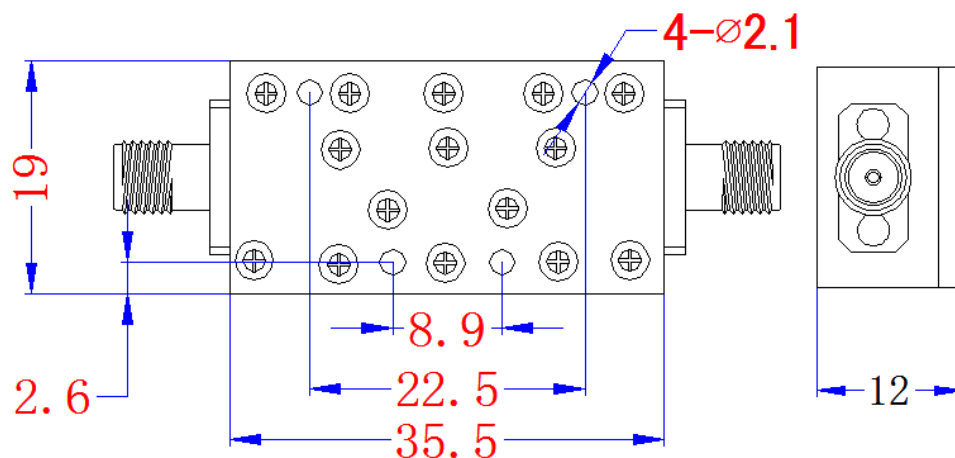

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000