


# LDC-0.2/6-30s

## Directional Coupler

### Specifications

- Frequency Range: 200~6000MHz
- Insertion Loss:  $\leq 1.2\text{dB}$
- VSWR:  $\leq 1.3 : 1$
- Coupling  $30 \pm 1.25\text{dB}(0.2\text{G}-0.8\text{G}) \pm 1.0\text{dB}(0.8\text{G}-6\text{G})$
- Directivity  $\geq 10\text{dB}$
- Impedance: 50 OHMS
- Port Connectors: SMA-Female
- Power Handling: 80 Watt

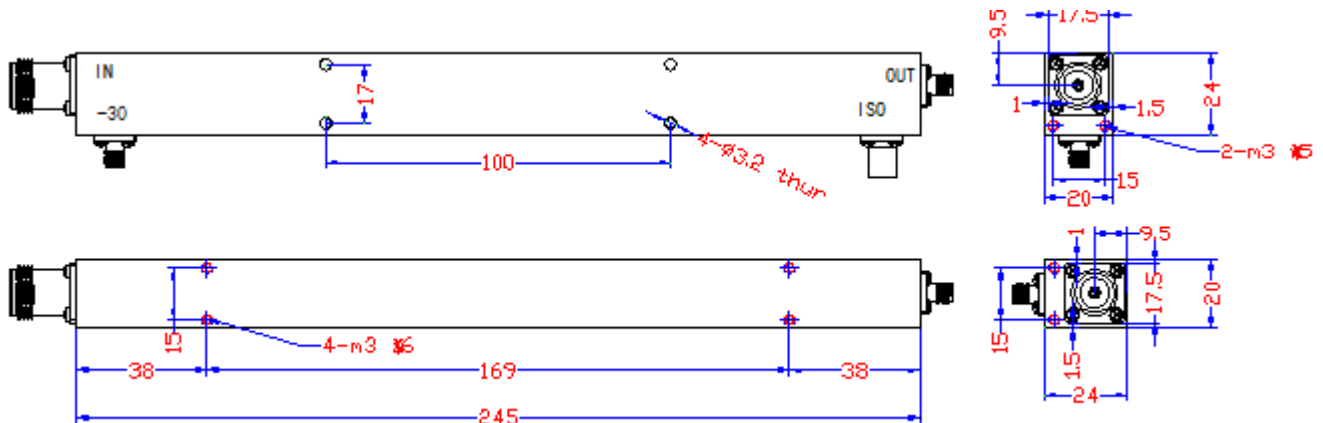

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000