


LDC-0.4/4.5-90S

90 Degree 3dB Bridge

- Frequency Range: 400~4500MHz
- Insertion Los ≤ 1.5
- Phase Balance: ± 5 Degrees
- Amplitude Balance ± 0.6
- VSWR: $\leq 1.35 : 1$
- Isolation: ≥ 20 dB
- Impedance: 50 OHMS
- Port Connectors: SMA-Female
- Power Handling: 30 Watt
- Operating Temperature: -45°C to $+85^{\circ}\text{C}$

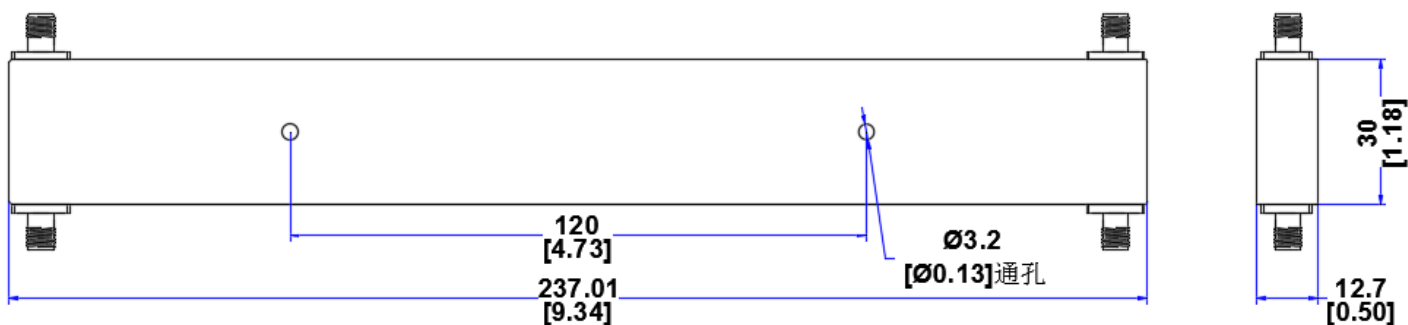

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000



ISO9001:2008 质量认证
ISO14001:2004 环境认证

技术文件 Technical Specifications Rev:A0

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

http://www.leader-mw.com Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000