
LPD-0.5/26.5-4S

Power Divider

Specifications

● Frequency Range:	500~26500MHz
● Insertion Loss:	≤5.2dB
● Amplitude Balance:	≤±0.4dB
● Phase Balance:	≤±6 deg
● VSWR:	≤1.60 : 1
● Isolation:	≥16dB
● Impedance:	50 OHMS
● Port Connectors:	SMA-Female
● Power Handling:	20 Watt
● Operating Temperature:	-32°Cto+85°C
● Surface Color:	Black

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd


电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

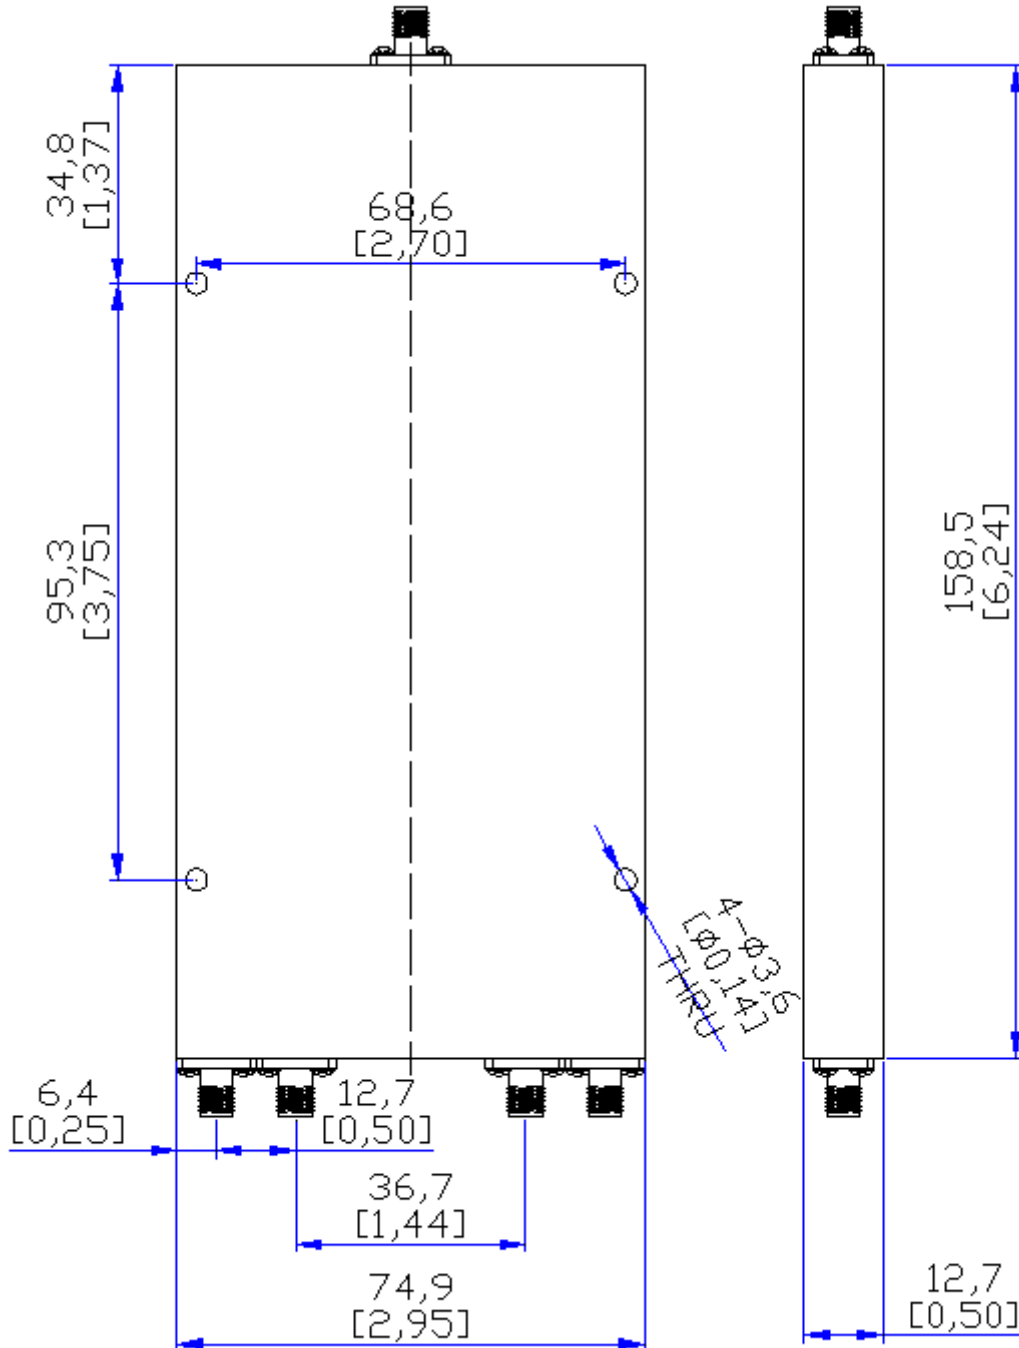

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000