


LPD-0.5/8-2S

Power Divider

Specifications

● Frequency Range:	500-8000MHz
● Insertion Loss:	$\leq 1.2\text{dB}$
● Amplitude Balance:	$\pm 0.2\text{dB}$
● Phase Balance:	$\pm 2\text{deg}$
● VSWR:	$\leq 1.4 : 1$
● Isolation:	$\geq 20\text{dB}$
● Impedance:	50 OHMS
● Power Handling:	20Watt
● Port Connectors:	S-Female
● Operating Temperature:	-30°C to $+60^{\circ}\text{C}$

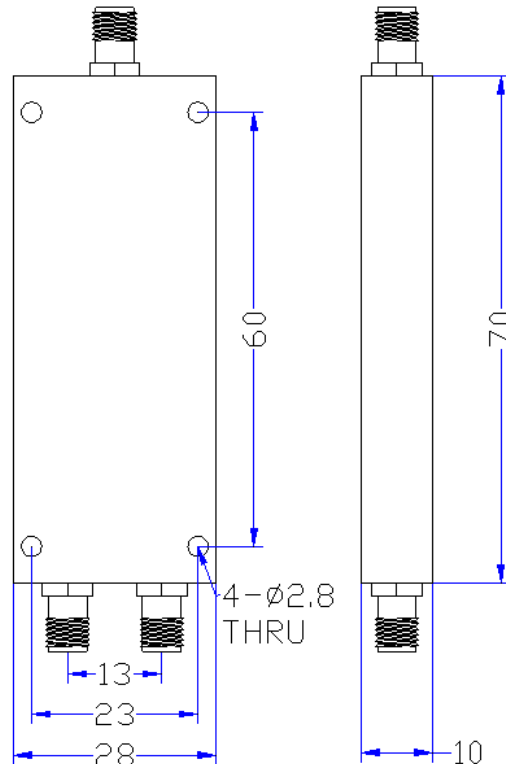

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd


电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

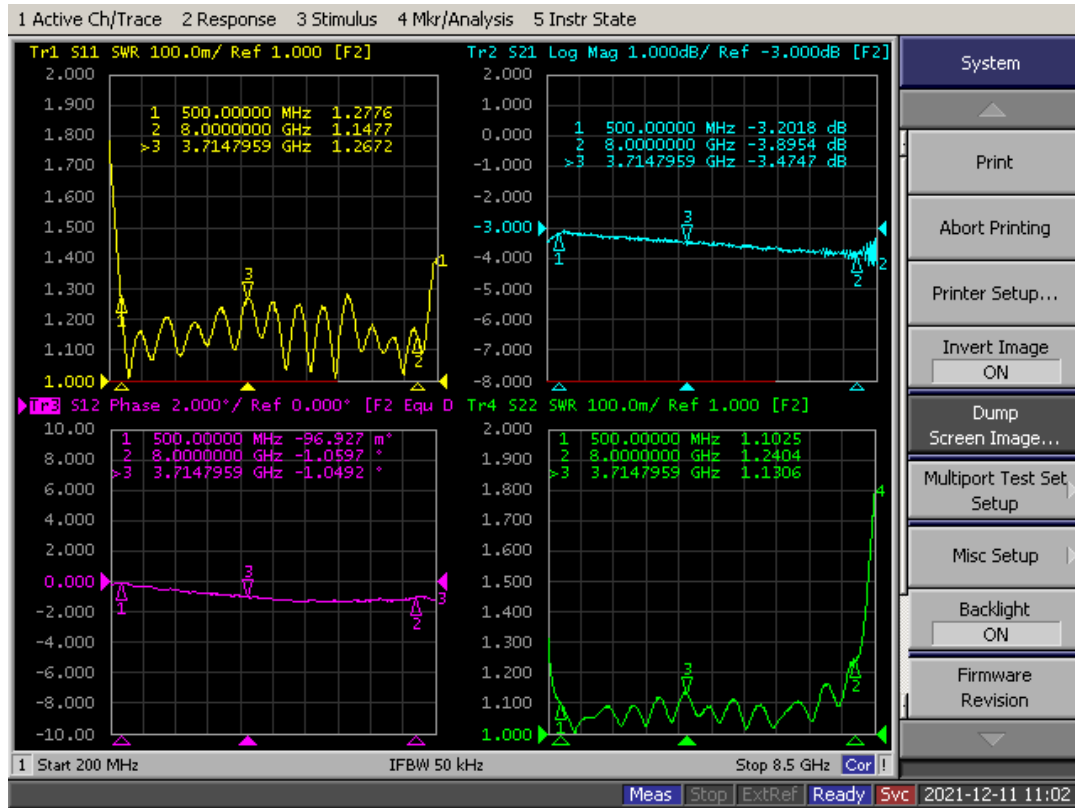

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000



利德尔

