


LPD-6/18-9S

Power Divider

Specifications

- Frequency Range: 6000~18000MHz
- Insertion Los: ≤ 1.5 dB(6-10GHz)
 ≤ 2.5 dB(10-18GHz)
- Amplitude Balance: $\leq \pm 0.6$ dB
- Phase Balance : $\leq \pm 8$ deg
- VSWR: $\leq 1.6 : 1$
- Isolation: ≥ 18 dB
- Impedance: 50 OHMS
- Port Connectors) : SMA-Female
- Power Handling: 30 Watt
- Surface Color:

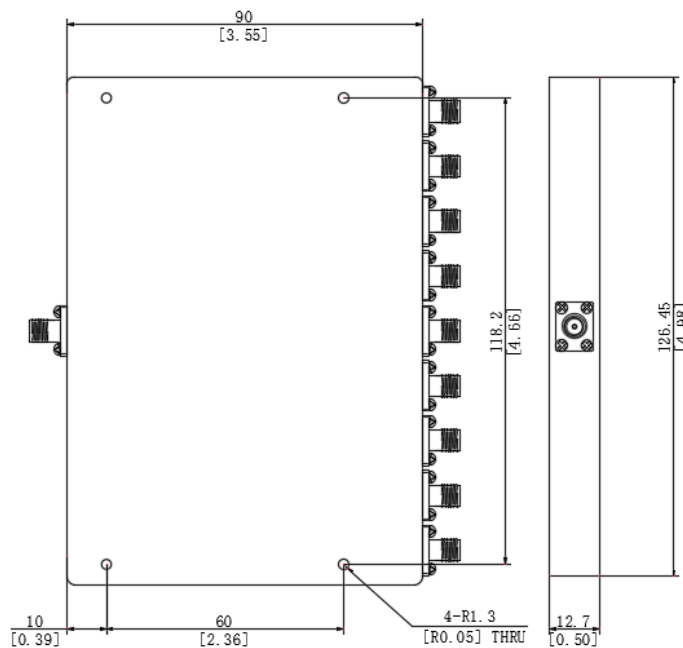

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000



ISO9001:2008 质量认证
ISO14001:2004 环境认证

技术文件 Technical Specifications Rev:A0

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000