


LPD-6-26.5-4S

Power Divider

Specifications

- Frequency Range: 6000~26500MHz
- Insertion Loss: ≤ 1.9 dB
- Amplitude Balance: $\leq \pm 0.5$ dB
- Phase Balance: $\leq \pm 5$ deg
- VSWR: $\leq 1.50 : 1$
- Isolation: ≥ 18 dB
- Impedance: 50 OHMS
- Port Connectors: SMA-Female
- Power Handling: 20Watt
- Operating Temperature: -32°C to $+85^{\circ}\text{C}$
- Surface Color:

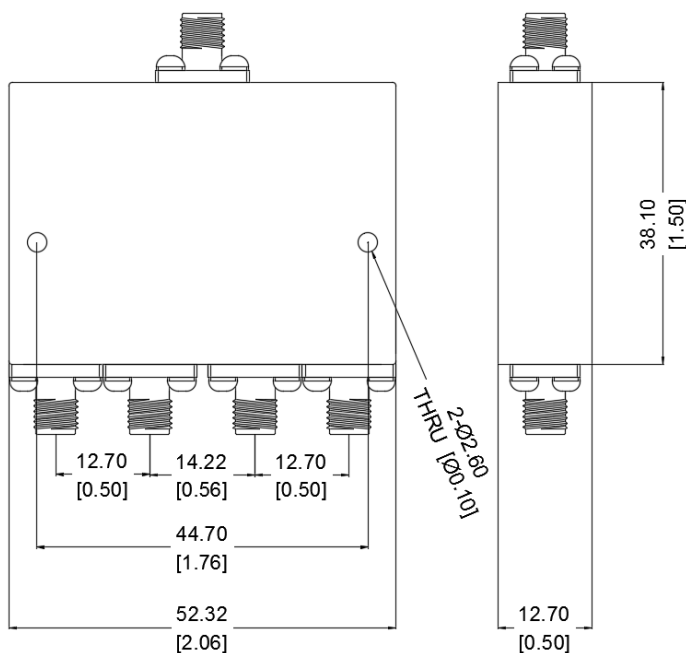

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000