

Part No:LSJ-10/11-30db-WR90-25W

Low PIM WR90 Waveguide Fixed Attenuator



Specifications

Item	Specification
Frequency range	10-11GHz
Impedance (Nominal)	50Ω
Power rating	25 Watt@25°C
Attenuation	30dB+/- 1.0dB/max
V.S.W.R (Max)	1.2: 1
Flanges	FDP100
dimension	118*53.2*40.5
Waveguide	WR90
Weight	0.35KG
Colour	Brushed black (matte)
Environmental Specifications	
Operational Temperature	-40 °C~+85 °C
Storage Temperature	-50 °C~+105 °C
Vibration	25gRMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35 ℃, 95%RH at 40 ℃
Shock	20G for 11msec half sine wave,3 axis both directions

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000


No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

Mechanical Specifications	
Housing	Aluminum
Surface treatment	Natural conductive oxidation
Rohs	compliant
Weight	0.35kg
Attenuation accuracy	

All Dimensions in mm

All Connectors: WR90

Tolerance : $\pm 0.3\text{MM}$

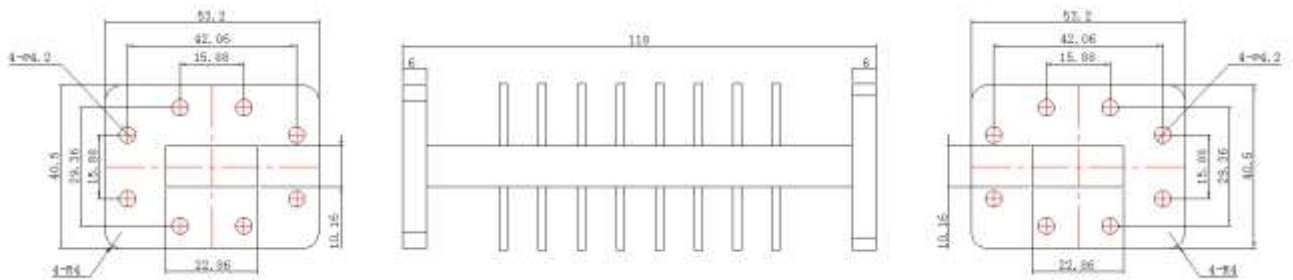

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

http://www.leader-mw.com Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000