

## Part No:LSJ-6-30db-WR137-25W

### LOW PIM WR90 Waveguide Fixed Attenuator



#### Specifications

Item	Specification
Frequency range	6GHz
Impedance (Nominal)	50Ω
Power rating	25 Watt@25°C
Attenuation	30dB+/- 0.5dB/max
V.S.W.R (Max)	1.3: 1
Flanges	FDP70
dimension	140*80*80
Waveguide	WR137
Weight	0.3KG
Colour	Brushed black (matte)
Environmental Specifications	
Operational Temperature	-40 °C~+85 °C
Storage Temperature	-50 °C~+105 °C
Vibration	25gRMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35 ℃, 95%RH at 40 ℃

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000


No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

Shock	20G for 11msec half sine wave,3 axis both directions
Mechanical Specifications	
Housing	Aluminum
Surface treatment	Natural conductive oxidation
Rohs	compliant
Weight	0.3kg
Attenuation accuracy	

All Dimensions in mm

All Connectors: WR90

Tolerance :  $\pm 0.3\text{MM}$

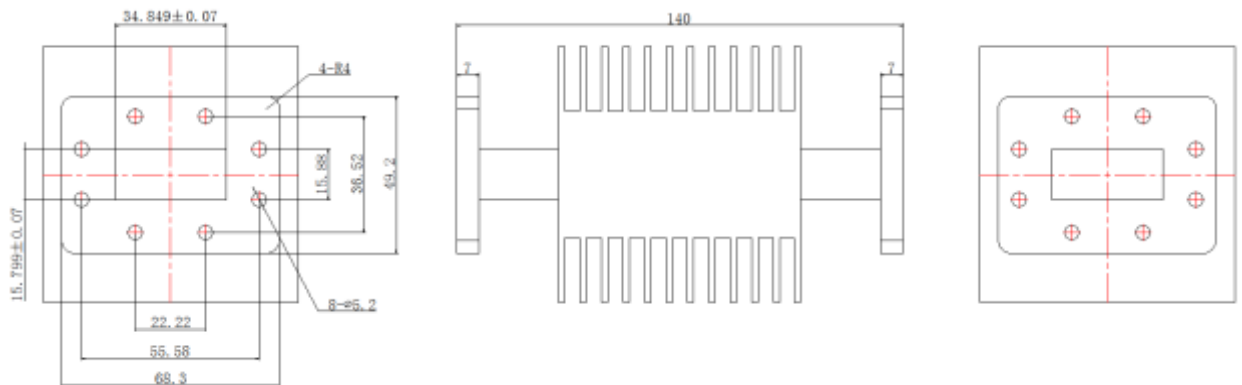

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

http://www.leader-mw.com Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000