

LSJ-DC/6-10W-N Attenuator

LEADER-MW	Specifications
Item	Specification
Frequency range	DC ~ 6GHz
Impedance (Nominal)	50Ω
Power rating	10 Watt
Peak Power(5 μs)	5 KW
Attenuation	XdB+/- X dB/max
V.S.W.R (Max)	1.25: 1--1.45
Connector type	N male(Input) – female(Output)
dimension	Φ30*84.5mm
Temperature Range	-55°C~ 85°C
Weight	0.1KG
Colour	Black
LEADER-MW	Mechanical

Housing	Aluminum blacken anodize
Connecter	Tri-metal plated brass
Rohs	compliant

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

http://www.leader-mw.com Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000



ISO9001:2008 质量认证
ISO14001:2004 环境认证

S/N: SF180503
技术文件 Technical Specifications Rev:A0

利德尔

Male contact	Gold plated brass
Femal contact	Gold plated beryllium brass

LEADER-MW		Attenuation accuracy			
Attenuator(d B)	Accuracy \pm dB				
	DC-4G	DC-8G	DC-12.4G	DC-18G	
1-10	0.4	0.5	0.6	0.8	
11-20	0.5	0.6	0.7	0.9	
21-30	0.6	0.8	0.8	1.0	
31-40	0.7	0.8	0.9	1.2	

LEADER-MW		VSWR	
Frequency	VSWR		
DC-4Ghz	1.2		
DC-8Ghz	1.25		
DC-12.4Ghz	1.35		
DC-18Ghz	1.45		

All Dimensions in mm

All Connectors:N-F、N-M

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116


http://www.leader-mw.com Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

Tolerance : $\pm 0.3\text{MM}$

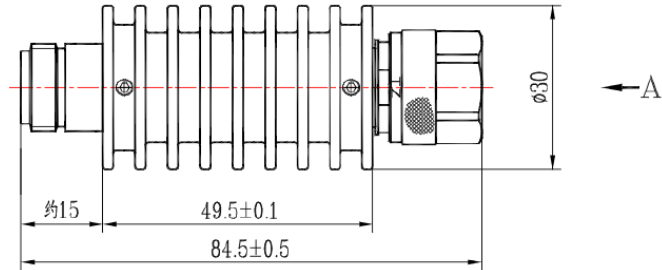

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

http://www.leader-mw.com Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000