

Part No:LSJ-DC/6-N-1000W

Attenuator



Specifications

Item	Specification
Frequency range	DC ~ 6GHz
Impedance (Nominal)	50Ω
Power rating	1000 Watt@25°C
Peak Power(5 μs)	5 KW
Attenuation	XdB+/- X dB/max
V.S.W.R (Max)	1.35
Connector type	N male(Input) – female(Output)
dimension	
Temperature Range	-55°C~ 85°C
Weight	3KG
Colour	Brushed black (matte)
Environmental Specifications	
Operational Temperature	-40 °C~+85 °C
Storage Temperature	-50 °C~+105 °C
Vibration	25gRMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35 ℃, 95%RH at 40 ℃

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

Shock	20G for 11msec half sine wave,3 axis both directions
Mechanical Specifications	
Housing	Aluminum blacken anodize
Connector	Tri-metal plated brass
Female Contact:	gold plated beryllium brass
Male contact	Male contact
Rohs	compliant
Weight	3kg
Attenuation accuracy	

Attenuator(dB)	Accuracy \pm dB	
	DC-4G	DC-6G
20	3.0	
30	2.5	
40	2.5	
50	2.5	3.0
60	2.5	

VSWR	
Frequency	VSWR
DC-4Ghz	1.25
DC-6Ghz	1.35
Outline drawing	

All Dimensions in mm

All Connectors:N-F、N-M

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116


http://www.leader-mw.com Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

Tolerance : $\pm 0.3\text{MM}$

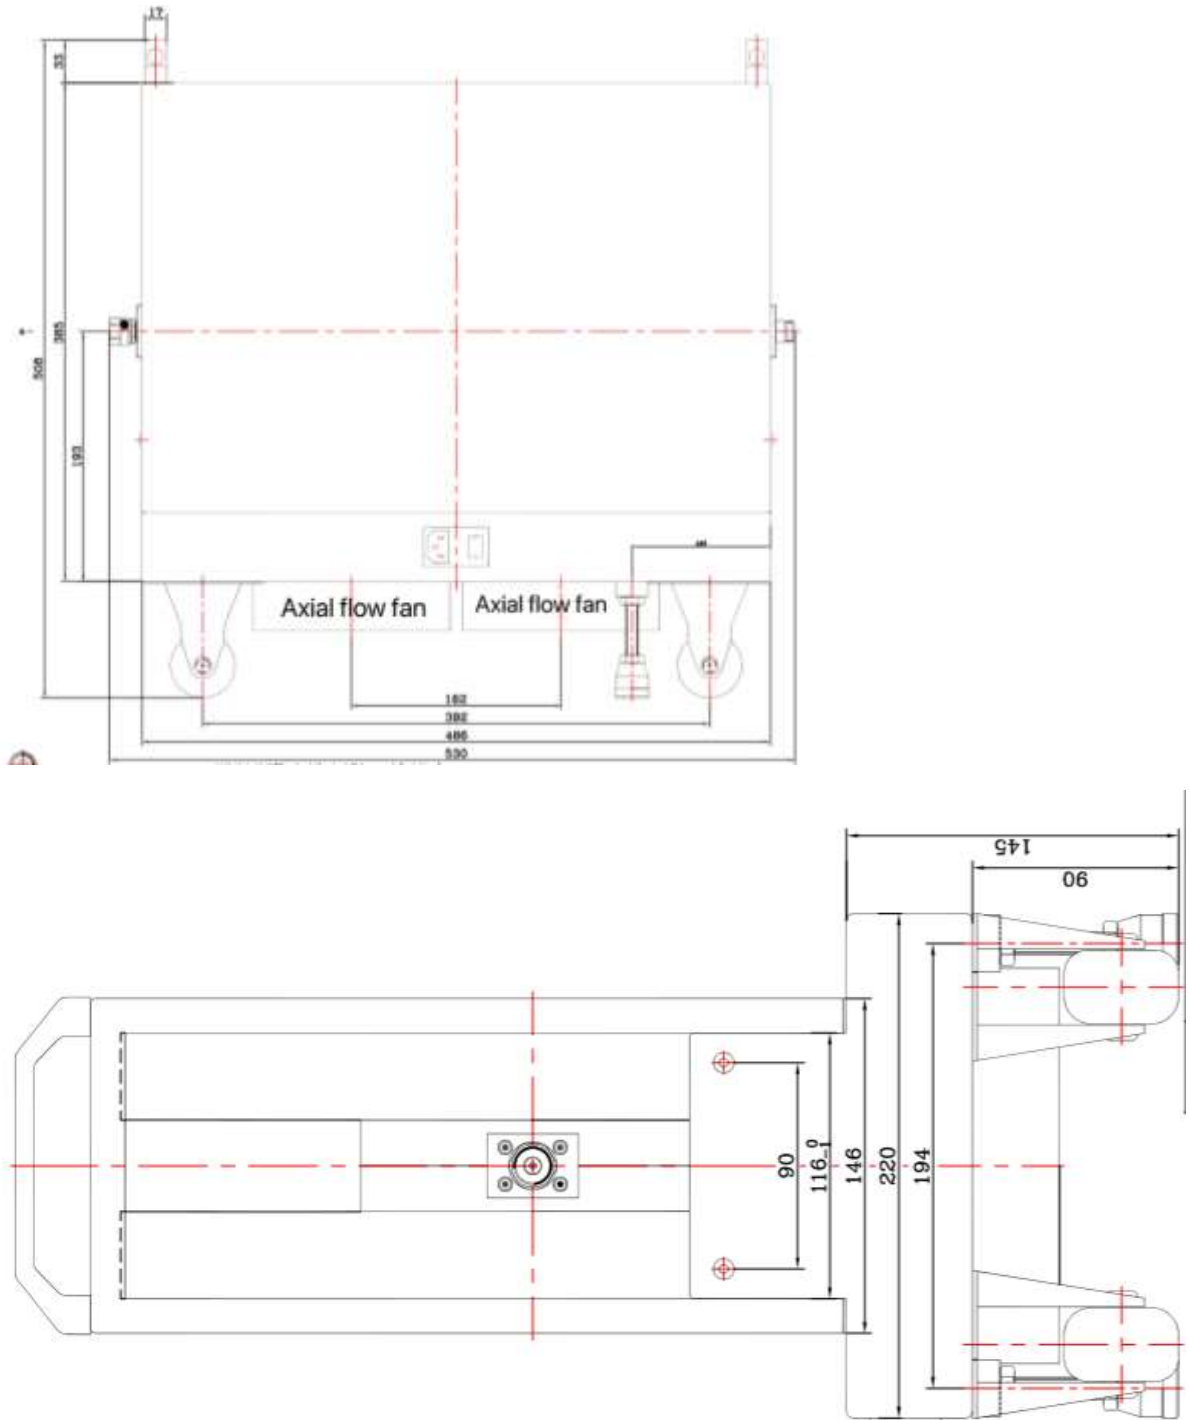

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000