

Part No:LSJ-DC/50-2.4-10W

Attenuator



Specifications

Item	Specification
Frequency range	DC ~ 50GHz
Impedance (Nominal)	50Ω
Power rating	10 Watt@25°C
Peak Power(5 μs)	5 KW
Attenuation	XdB+/- X dB/max
V.S.W.R (Max)	1.4
Connector type	2.4 male(Input) – female(Output)
dimension	Ø40*25.2
Temperature Range	-55°C~ 85°C
Weight	50g
Colour	Brushed black (matte)
Environmental Specifications	
Operational Temperature	-40 °C~+85 °C
Storage Temperature	-50 °C~+105 °C
Vibration	25gRMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35 ℃, 95%RH at 40 ℃

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000



S/N: SF180503

ISO9001:2008 质量认证
ISO14001:2004 环境认证

技术文件 Technical Specifications Rev:A0

Shock	20G for 11msec half sine wave,3 axis both directions
Mechanical Specifications	
Housing Heat Sinks:	Aluminum blacken anodize
Connector	Passivated stainless steel
Female Contact:	gold plated beryllium brass
Male contact	Brass,Gold plated
Rohs	compliant
Weight	50g
Attenuation accuracy	

Attenuator(dB)	Accuracy ±dB
	DC-50G
1-10	-1.5/+2.0
20	-1.5/+2.0
30	-1.5/+2.0

VSWR	
Frequency	VSWR
DC-50Ghz	1.4
Outline drawing	

All Dimensions in mm

All Connectors:2.4F

Tolerance : ±0.3MM

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd


电话: 028-65199117 传真: 028-65199116

http://www.leader-mw.com Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

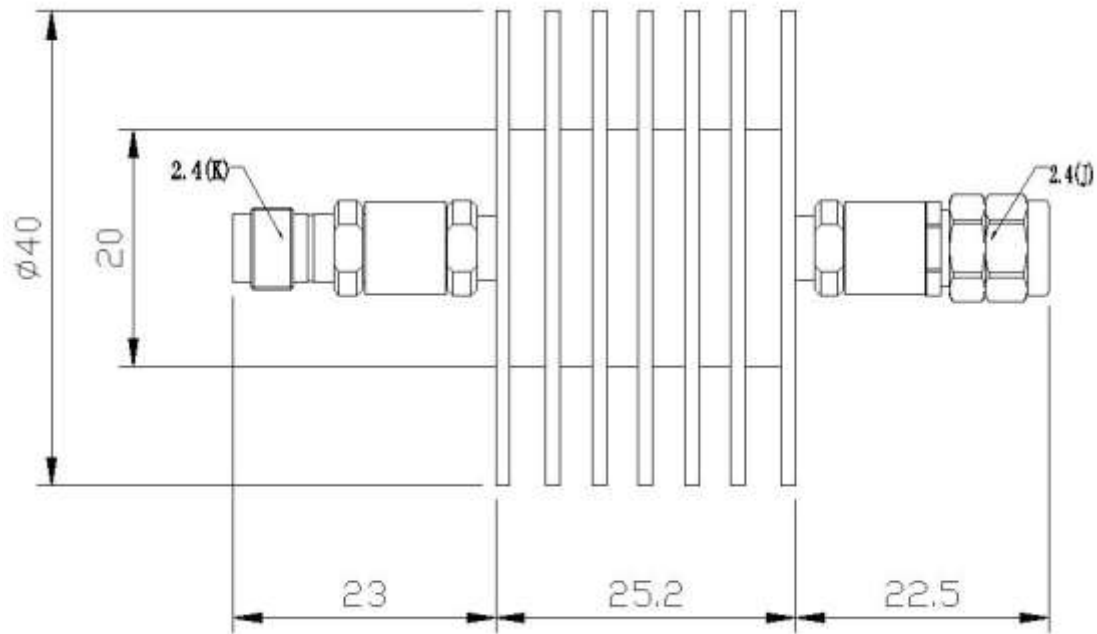

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

http://www.leader-mw.com Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000