

LSTF-9400/200 -2S

Cavity Filter

Stop Band Range	9300-9500MHz
Insertion Loss in pass band	≤ 2.0 dB
VSWR	$\leq 1.5:1$
Stop Band attenuation	≥ 40 dB
Band Pass	8200-9200Mhz&9600-14000Mhz
Max. Power	10W
Connectors	SMA-Female (50 Ω)
Surface Finish	Black
Configuration	As Below (tolerance ± 0.3 mm)

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd


电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

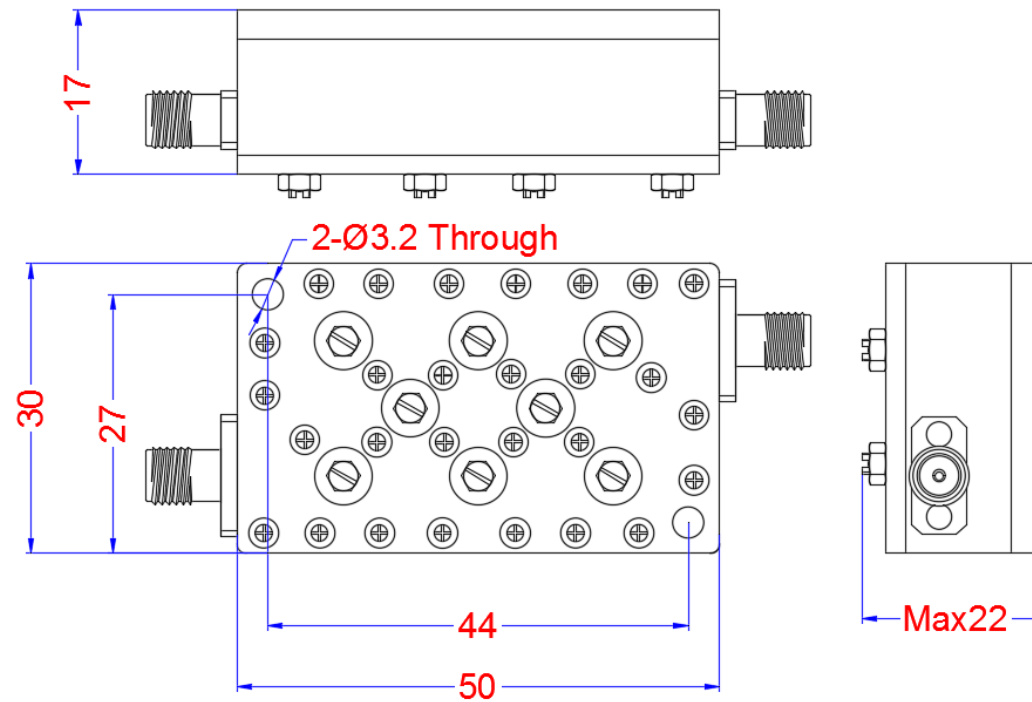

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

