


日期

签名

底图总号

旧底图总号

媒体编号

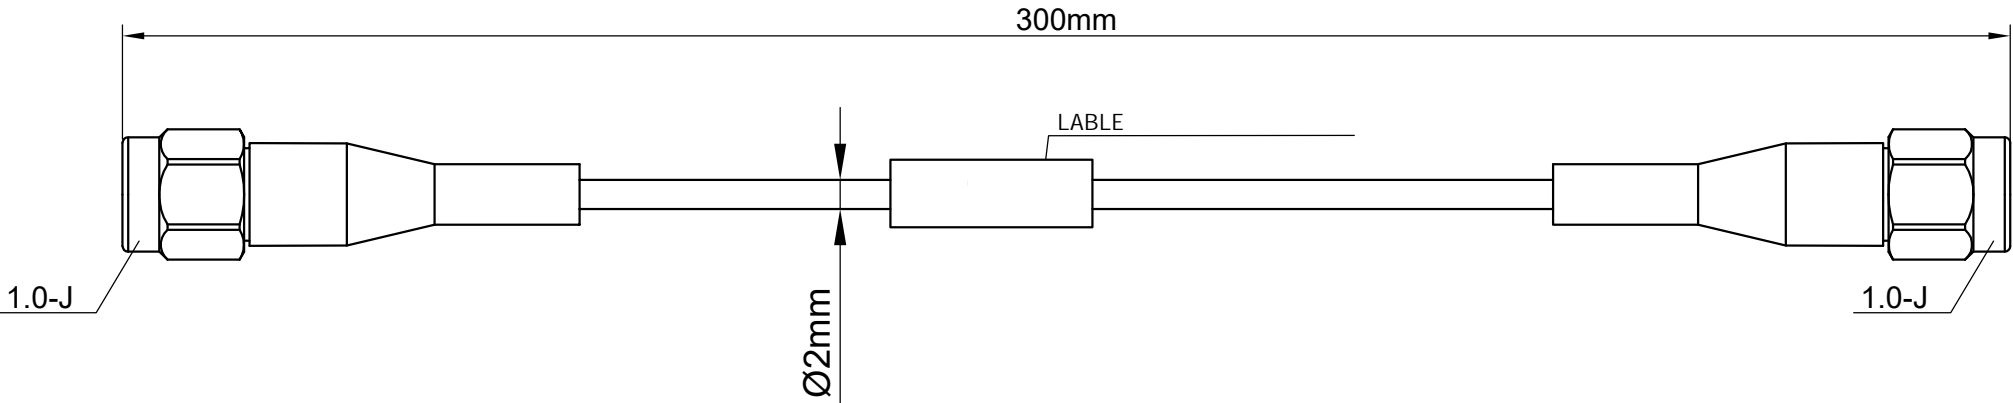

Specification:

1. Cable information:

- 1.1 Cable type: Flexible cable
- 1.2 impedance:  $50\ \Omega$
- 1.3 Mini bending radius: 10mm
- 1.4 Connector material
  - Outerconductor: stainless steel passivation
  - Center conductor: beryllium copper gold plated
  - Insulating medium: PEI

2. Product performance:

- 2.1: Impedance:  $50\ \Omega$
- 2.2: Frequency: DC-110GHz
- 2.3: VSWR:  $\leq 1.5$
- 2.4: Insertion loss:  $\leq 4.7\text{dB}$
- 2.5: voltage:  $\geq AC\ 500\text{Vrms}$
- 2.6: Insulation resistance:  $\geq 1000M\ \Omega$
- 2.7: durability: 500times
- 2.8: temperature:  $-55^{\circ}\text{C}\sim+125^{\circ}\text{C}$

					Product name:		standards		GJB1215A-2005	
					Cable assembly					
标记数量 更改单号 签名 日期					Part No:		阶段标记		S	
设计					LXP071-1.0-J~1.0-J-300		版本号		S1.0	
审核					scale		1:1		unit	
工艺					mm		质量/面积		/ /	
质量					第 张		共 张		chengdu leader microwave Tech.,	
标准化									视图	
批准										