


## LBF-488/548-1

### Cavity Filter

Frequency Range	488-548MHz
Insertion Loss	$\leq 1.0\text{dB}$
Ripple in band	$\leq 0.6\text{dB}$
VSWR	$\leq 1.3:1$
Rejection lower	$\geq 30\text{dB}@ \text{Dc-}474\text{MHz}$
Rejection Upper	$\geq 30\text{dB}@ 564\text{-}800\text{MHz}$
Operating .Temp	- 30°C ~ +50°C
Power handling	100W
Port Connectors	F-Female(75ohms)
Surface Finish	Black
Configuration	As Below (tolerance $\pm 0.5\text{mm}$ )

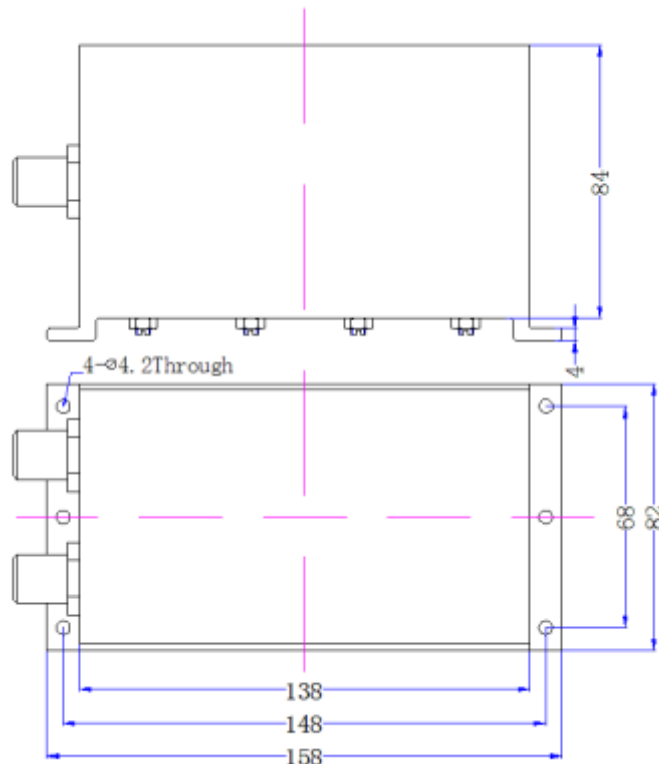

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000