

LSTF-483. 7/4 -1

Cavity Filter

Stop Band Range	481. 7-487. 7MHz
Insertion Loss in pass band	$\leq 1. 6\text{dB}$
VSWR	$\leq 1. 8: 1$
Stop Band attenuation	$\geq 30\text{dB}$
Band Pass	Dc-478Mhz@491MHz-1500Mhz
Operating .Temp	-30°C~+60°C
Max. Power	50W
Connectors	SMA-Female (50 Ω)
Surface Finish	Black
Configuration	As Below (tolerance $\pm 0. 3\text{mm}$)

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd


电话: 028-65199117 传真: 028-65199116

http://www.leader-mw.com Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

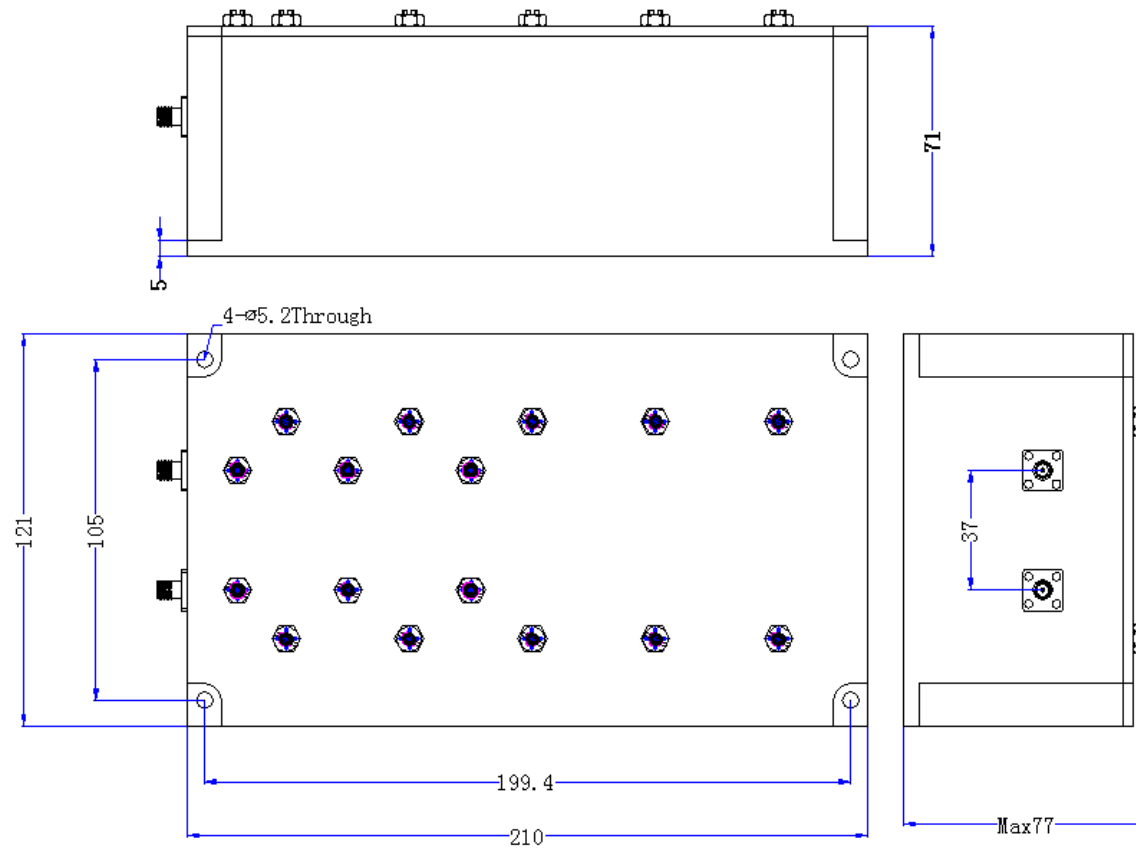

<http://www.leader-mw.com> leader-mw@foxmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000