

## LSTF-545/6 -1

### Cavity Filter

Stop Band Range	536-542MHz
Insertion Loss in pass band	$\leq 1.6$ dB
VSWR	$\leq 1.8:1$
Stop Band attenuation	$\geq 30$ dB
Band Pass	300-526Mhz@555MHz-900Mhz
Operating .Temp	-30°C~+50°C
Max. Power	10W
Connectors	F-Female (75Ω)
Surface Finish	Black
Configuration	As Below (tolerance $\pm 0.3$ mm)

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd


电话: 028-65199117 传真: 028-65199116

http://www.leader-mw.com Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

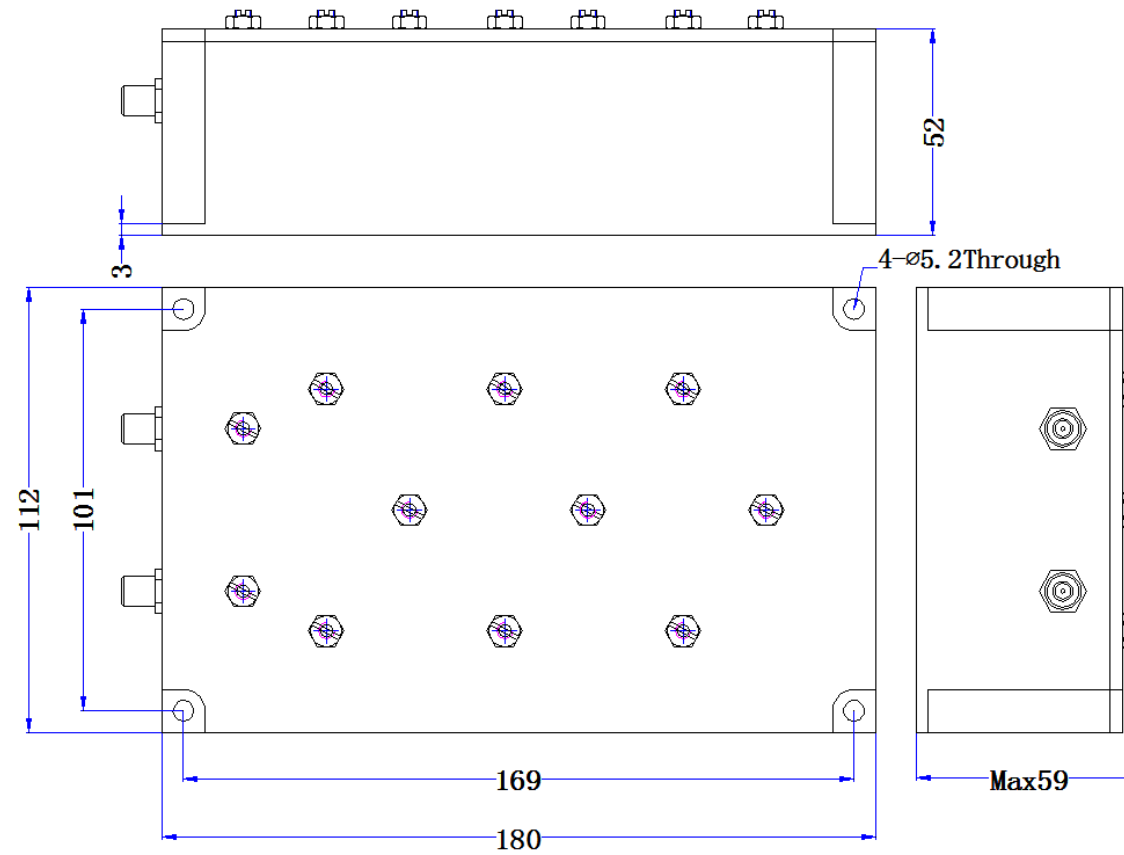

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000