


LPD-1/8-4S-1

Power Divider

Specifications

- Frequency Range: 1000~8000MHz
- Insertion Loss: $\leq 1.8\text{dB}$
- Amplitude Balance: $\leq \pm 0.4\text{dB}$
- Phase Balance: $\leq 4\text{ deg}$
- VSWR: $\leq 1.50 : 1$ (IN)
 $\leq 1.40 : 1$ (OUT)
- Isolation: $\geq 18\text{dB}$
- Impedance: 50 OHMS
- Port Connectors: SMA-Female
- Power Handling: 10 Watt
- Surface Color: Blue

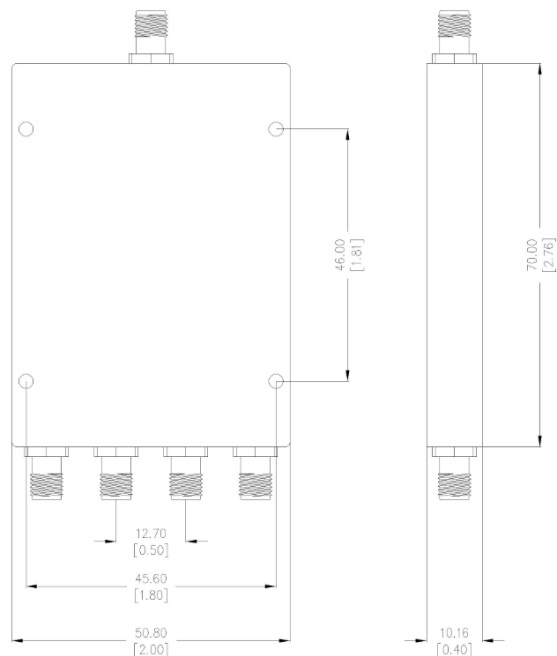

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000



成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd


电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000

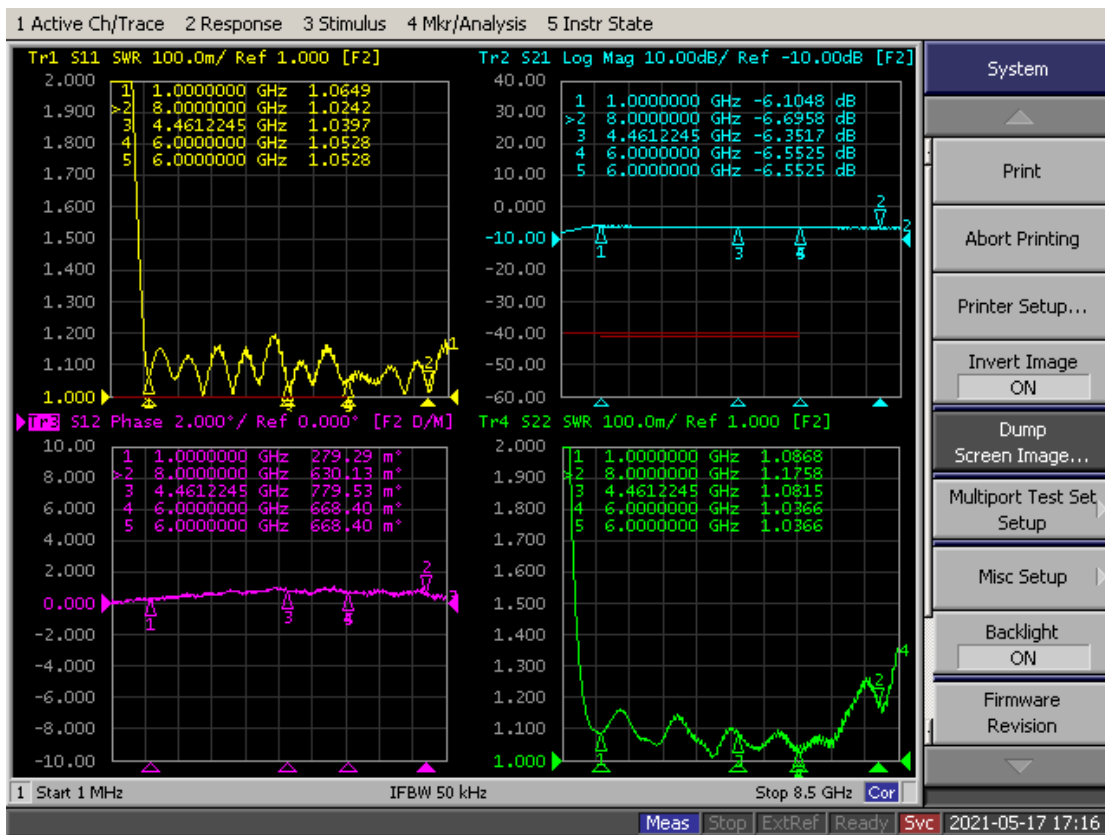

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leader-mw.com> Leader-mw@hotmail.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add:中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000