

Product: 0.85-0.95Ghz 24Way power divider

Part Number: LPD-0.85/0.95-24S

| Specification | | | | | |
|---------------|-----------------------------|--------------------------|---------|---------|-------|
| No. | Parameter | Minimum | Typical | Maximum | Units |
| 1 | Frequency range | 0.85 | - | 0.95 | GHz |
| 2 | Insertion Loss | - | - | 4 | dB |
| 3 | Phase Balance: | - | - | ±8 | dB |
| 4 | Amplitude Balance | - | - | ±0.5 | dB |
| 5 | Isolation | 20 | - | | dB |
| 6 | VSWR | 1.3 | - | 1.7 | - |
| 7 | Power | | | 20 | W cw |
| 8 | Operating Temperature Range | -40 | - | +85 | °C |
| 9 | Impedance | - | 50 | - | Ω |
| 10 | Connector | SMA-F | | | |
| 11 | Preferred finish | Black/Sliver/yellow/blue | | | |

Remarks:

1. Not include Theoretical loss 13.8db 2. Power rating is for load vswr better than 1.20:1

| Environmental Specifications | |
|------------------------------|--|
| Operational Temperature | -40°C~+85°C |
| Storage Temperature | -50°C~+105°C |
| Altitude | 30,000 ft. (Epoxy Sealed Controlled environment) |
| | 60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional) |
| Vibration | 25gRMS (15 degrees 2KHz) endurance, 1 hour per axis |
| Humidity | 100% RH at 35°C, 95%RH at 40°C |
| Shock | 20G for 11msec half sine wave, 3 axis both directions |
| Mechanical Specifications | |
| Housing | Aluminum |
| Connector | ternary alloy three-part alloy |
| Female Contact: | gold plated beryllium brass |
| Rohs | compliant |
| Weight | 1.1 kg |

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leadermicrowave.com> sales@leader-mw.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000


Outline Drawing:

All Dimensions in mm

Outline Tolerances $\pm 0.5(0.02)$

Mounting Holes Tolerances $\pm 0.2(0.008)$

All Connectors: SMA-Female

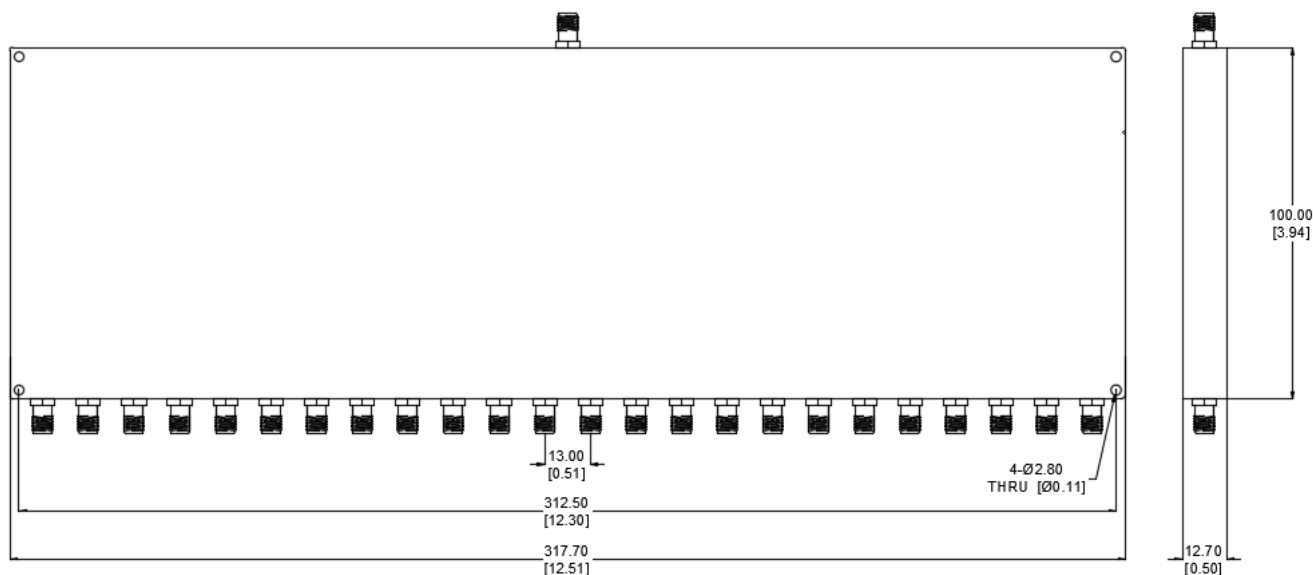

TEST DATA

成都利德尔科技有限公司 ChengDu Leader Microwave Technology Co.,Ltd

电话: 028-65199117 传真: 028-65199116

<http://www.leadermicrowave.com> sales@leader-mw.com

TEL: +86-28-65199117 FAX: +86-28-65199116

Add: 中国 成都市成华区华翰路 89 号 610000

No.89,Huahan Road, chenghua Zone Chengdu, Sichuan China Zip Code:610000